

FLATDECK & DECKOVER TRAILER GUIDE



FLATDECKS: (LS) (LD) (L3) (LY)

DECKOVERS: (L6) (F8) (PL)



THE PROFESSIONAL GRADE STANDARD

DECKOVERS

MEDIUM DUTY DECKOVER 6" CHANNEL (L6)	4
8" I-BEAM DECKOVER (F8).....	5
LOW-PRO PINTLE WITH DUALS (PL)	6

FLATDECKS

LOW-PRO FLATDECK WITH SINGLES (LS).....	7
LOW-PRO FLATDECK WITH DUALS (LD).....	8
14" I-BEAM LOW-PRO WITH DUALS (L3).....	9

HYDRAULIC DOVETAILS

LOW-PRO WITH HYDRAULIC DOVE (LY).....	10
---------------------------------------	----



LOW-PRO WITH HYDRAULIC DOVE (LY)

For decades, PJ flatdeck trailers have been known as the go-to for serious truckers and industrial applications, and for good reason. With industry-leading frame warranties, top-shelf components and the ability to customize with near-limitless option combinations, the pros know who to come to for their professional grade equipment. Intelligently designed

with years of real-world experience, PJ flatdeck trailers are built to work until the job is done. And it's all backed by the biggest independent dealer network in North America, to support you wherever the road goes. Contact your local independent PJ Trailers dealer today for pricing and availability.





MEDIUM DUTY DECKOVER 6" CHANNEL (L6)

Lengths: 14' - 24'



*Pictured with optional 3' dovetail & foldup ramps



Length	Axles	Est. Base Weight†
16'	2 x 5,200 lbs	2,820 lbs / 1,279 kg
18'	2 x 5,200 lbs	2,980 lbs / 1,352 kg
20'	2 x 5,200 lbs	3,020 lbs / 1,370 kg

† Weights are estimated for base trailer.
PJ Trailers makes no guarantee regarding the accuracy of estimated weights.

STANDARD FEATURES

- 9,990 lb. G.V.W.R.
- 5,200 lb. x 2 G.A.W.R.
- Adjustable 2 5/16" Ball Bulldog Coupler
- Safety Chains
- 1 - Drop Leg Jack (7,000 lb.)
- 2 - Dexter E-Z Lube Brake Axles (5,200 lb.)
- 6 Leaf Slipper Spring Suspension
- 4 - 15" White Spoke Wheels
- 4 - 225/75R15 Radial Tires
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Tool Tray In Tongue
- 6' Slide in Ramps w/ Holders
- 6" Channel Tongue
- 6" Channel Frame Main Frame
- 3x2" Angle Crossmembers 16" on Center
- 2" Treated Pine Lumber Deck
- 101" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- All-Weather Wiring Harness (7-way RV)
- Sand Blasted, Acid Washed, Powder Coated
- 5 year Dexter Axle Warranty

AVAILABLE OPTIONS

* denotes a standard feature

COUPLER OPTIONS

- BP 2 5/16" Adjustable (14,000 lb.)*
- 3" Pintle Eye - Channel-mount (20,000 lb.)

AXLE OPTIONS

5,200# (DEXTER)

- (2) Electric (Spring)*
- (2) Electric (Torsion)
- (2) Surge Hydraulic Drum [Surge Coupler] (Spring)

TAIL OPTIONS

- Straight Deck w/24x 6 ft Slide-in Ramps Exp Metal*
- 3' Dovetail w/24x 6 ft Slide-in Ramps Exp Metal
- 3' Dovetail w/ 2, 16"x60" Foldup Ramps
- 3' Dovetail w/ 3, 16"x60" Foldup Ramps
- 3' Dovetail w/ 2, 31"x66"HD Foldup Ramps
- 3' Dovetail w/ 4' Heavy Duty Fold-up Gate
- 3' Dovetail w/ Split Heavy Duty Gate

OTHER OPTIONS

- Blackwood Pro Full Deck
- Blackwood Pro Outer Deck
- 1 Extra Pair Flushmount D-Rings on Steel Floor
- 1 Pair D-Rings
- Add 7-Way RV Plug to Rear Bumper
- 1 Pair Weld-On Strap Ratchets
- 1 Side-mount Toolbox 30"x14"
- Upgrade to 2-10k Jacks
- 10k Jack (Bumper Pull)
- Upgrade to 235/80 R16 on 52k Axles w /1" Spacer

- 12"oc Crossmembers
- Rough Oak Floor
- 4" Ratchets every 4ft w/ Slide Track Mount Only for Spare Tire
- 11ga(1/8")DP Steel Floor w/4 Flushmount D-Rings & 12"oc
- Front Toolbox (Bumper Pull)
- Spare Tire and Mount (Bumper Pull)



TAIL OPTIONS

Two 6' slide-in ramps are included as standard with a straight deck, but the L6 is available with a wide variety of dovetail, gate, and stand-up ramp options depending on your unique application.



DEXTER AXLES

Dexter axles with an extended manufacturer's warranty are included as-standard on the L6, and feature the EZ-Lube hub system that eliminates the need to manually pack bearings during routine maintenance.

8" I-BEAM DECKOVER (F8)



Lengths: 16' - 30'



*Pictured with optional 3' dovetail



Length	Axles	Est. Base Weight†
16'	2 x 7,000 lbs	3,200 lbs / 1,451 kg
18'	2 x 7,000 lbs	3,400 lbs / 1,542 kg
20'	2 x 7,000 lbs	3,600 lbs / 1,633 kg
22'	2 x 7,000 lbs	3,820 lbs / 1,733 kg
24'	2 x 7,000 lbs	4,060 lbs / 1,842 kg
26'	2 x 7,000 lbs	4,340 lbs / 1,969 kg

† Weights are estimated for base trailer.

PJ Trailers makes no guarantee regarding the accuracy of estimated weights.

STANDARD FEATURES

- 14,000 lb. G.V.W.R.
- 7,000 lb. x 2 G.A.W.R.
- Adjustable 2 5/16" Ball Bulldog Coupler
- Safety Chains
- 1 - Drop Leg Jack (10,000 lb.)
- 2 - Dexter E- Z lube Brake Axles (7,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 4 - 16" White Spoke Wheels
- 4 - 235/80R16 Radial Tires (3,520 lb)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Tool Tray In Tongue
- 6' 6" Slide in Ramps w/ Holders
- 8" x 10 lb. I-Beam Tongue
- 8" x 10 lb. I-Beam Main Frame
- 3" Channel Crossmembers 16" on Center
- 2" Treated Pine Lumber Deck
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 96" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- All-Weather Wiring Harness (7-way RV)
- Sand Blasted, Acid Washed, Powder Coated
- GN Option Equipped with 2 Jacks
- GN Equipped with Lockable Front Toolbox
- GN Equipped with Chain Holder
- 5 year Dexter Axle Warranty

AVAILABLE OPTIONS

* denotes a standard feature

COUPLER OPTIONS

- BP 2 5/16" Adjustable (14,000 lb.)*
- BP 2 5/16" Adjustable Rigid Mount (25,000 lb.)
- Rigid Mount Pintle Eye- Face-mount
- 3" Pintle Eye - Channel-mount (20,000 lb.)
- GN 2 5/16" Round (25,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox
- BP 2 5/16" Adj. Cplr w/HD 6 hole Chn Brkt (20k)

AXLE OPTIONS

7,000# (DEXTER)

- (2) Electric (Spring)*
- (2) Electric (Torsion)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Spring)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Torsion)
- (3) Electric (Spring)
- (3) Electric (Torsion)
- (3) Elec/Hyd Disc (1,600 PSI Pump) (Spring)
- (3) Elec/Hyd Disc (1,600 PSI Pump) (Torsion)

8,000# OIL BATH W/14 PLY LR-G TIRES (DEXTER)

- (2) Electric (Spring)
- (2) Electric (Torsion)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Spring)
- (2) Surge Hydraulic Drum [Surge Coupler] (Spring)
- (3) Electric (Spring)
- (3) Electric (Torsion)

7,000# W/14 PLY LR-G TIRES (DEXTER)

- (2) Electric (Spring)
- (2) Electric (Torsion)

- (2) Elec/Hyd Disc (1,600 PSI Pump) (Spring)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Torsion)
- (3) Electric (Spring)
- (3) Electric (Torsion)
- (3) Elec/Hyd Disc (1,600 PSI Pump) (Spring)
- (3) Elec/Hyd Disc (1,600 PSI Pump) (Torsion)

8,000# OIL BATH AXLES, 235/80 LR-E TIRES (DEXTER)

- (2) Electric (Spring)

8,000# OIL BATH W/215/75R17.5 LR-H SINGLES(DEXTER)

- (2) Electric (Spring)(2) Elec/Hyd Disc (1,600 PSI Pump) (Torsion)

TAIL OPTIONS

- Straight Deck w/ 6'6" Slide-in Ramps*
- 3' Dovetail w/ 5' Slide-in Ramps (18' and up)
- 3' Dovetail w/ 2, 16"x60" Foldup Ramps
- 3' Dovetail w/ 2, 31"x66"HD Foldup Ramps
- 4' Dove with 2 Flipover Ramps (20' and up)
- 4' Dove with 3 Flipover Ramps (20' and up)
- 4' Dove with 4ft. Monster Ramps (20' and up)
- 5' Dove with 2 Flipover Ramps (w/R opt.& 20' & up)

OTHER OPTIONS

- Add BlackWood Pro to Dovetail and Ramps
- Add BlackWood Pro to Dovetail
- Blackwood Pro Full Deck
- Blackwood Pro Outer Deck
- 1 Extra Pair Flushmount D-Rings on Steel Floor
- 1 Pair D-Rings
- Add 7-Way RV Plug to Rear Bumper

- Under Frame Fork Rack (96" Wide Only)
- 2 Hydraulic Monster Jacks™
- Light Bar w/4 Lights
- 1 Pair Weld-On Strap Ratchets
- 1 Side-mount Toolbox 30"x14"
- Under Frame Spare Tire and Mount
- Monster Steps on Both Sides
- Plate for Winch
- Full Size Toolbox (Bumper Pull)
- 12"oc Crossmembers
- Rough Oak Floor
- 2nd Jack
- Receiver Hitch
- 4" Ratchets every 4ft w/ Slide Track
- Mount Only for Spare Tire
- 11ga (1/8") DP Steel Floor w/ 4 D-Rings & 12"oc
- Front Toolbox (Bumper Pull)
- 102" Deck Width
- Spare Tire and Mount (Bumper Pull)
- Ramp Support Arms w/. Dove



LOW-PRO PINTLE WITH DUALS (PL)

Lengths: 20' - 40'



*Pictured with optional
5' Dovetail w/ 2 Flip-over Monster Ramps



Length	Axles	Est. Base Weight†
20'	2 x 10,000 lbs	5,210 lbs / 2,363 kg
25'	2 x 10,000 lbs	5,860 lbs / 2,658 kg
30'	2 x 10,000 lbs	6,510 lbs / 2,953 kg
35'	2 x 10,000 lbs	7,160 lbs / 3,248 kg
40'	2 x 10,000 lbs	7,810 lbs / 3,543 kg

† Weights are estimated for base trailer.
PJ Trailers makes no guarantee regarding the accuracy of estimated weights.

STANDARD FEATURES

- 25,000 lb. G.V.W.R.
- 10,000 lb. x 2 G.A.W.R.
- 3" Pintle Eye Face Mount Coupler
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Dexter Oil Bath Brake Axles (10,000 lb.)
- 5 Leaf Slipper Spring Suspension
- 8 Dual Wheels, 16" Grey, 8 on 6.5" Bolt Pattern
- 8 - 16" 235/80R16 Radial Tires (3,090 lb)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- Lockable Front Toolbox
- 8' Ramps w/ Holders
- Frame Bridge Standard on 30' and up
- 12" x 19 lb. I-Beam Main Frame
- 3" Channel Crossmembers 16" on Center
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- All-Weather Wiring Harness (7-way RV)
- Sand Blasted, Acid Washed, Powder Coated
- Spare Tire

AVAILABLE OPTIONS

* denotes a standard feature

COUPLER OPTIONS

- 3" Pintle Eye - Face-mount (36,000 lb.)*
- BP 2 3/8" Adj Rigid Mount (25,000 lb.)

AXLE OPTIONS

10,000# AXLES (DEXTER)

- (2) Electric (Air Ride)
- (2) Electric (Spring)*
- (2) Electric (Torsion)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Air Ride)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Spring)
- (3) Electric (Spring)
- (3) Electric (Torsion)
- (3) Elec/Hyd Disc (1,600 PSI Pump) (Spring)

12,000# AXLES (DEXTER)

- (2) Electric (Spring)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Air Ride)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Spring)
- (3) Electric (Spring)
- (3) Elec/Hyd Disc (1,600 PSI Pump) (Spring)

12,000# W/14 PLY LR-G DUAL T&W (DEXTER)

- (2) Electric (Spring)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Spring)

15,000# W/215/75R17.5" LR-H DUAL T&W (DEXTER)

- (2) Elec/Hyd Drum (1,000 PSI Pump) (Spring)

12,000# W/215/75R17.5" LR-H DUAL T&W (DEXTER)

- (2) Elec/Hyd Disc (1,600 PSI Pump) (Air Ride)

10,000# W/235/75R17.5" LR-J SINGLE T&W (DEXTER)

- (2) Electric (Spring)
- (2) Electric (Torsion)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Spring)

10,000# W/14 PLY LR-G DUAL T&W(DEXTER)

- (2) Electric (Spring)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Spring)

TAIL OPTIONS

- Straight Deck w/ 2 Slide-in Ramps*
- 5' Dovetail w/ 2 Flip-over Ramps w/HD Gusset
- 5' Dovetail w/ 2 Flip-over Ramps
- 5' Dovetail w/ 3 Flip-over Ramps w/HD Gusset
- 5' Dovetail w/ 3 Flip-over Ramps
- 5' Dovetail w/ 2 Flip-over Monster Ramps
- 5' Dovetail w/ Power Tail (Pat. Pend. TX Only)

OTHER OPTIONS

- Blackwood Pro Full Deck
- Blackwood Pro Outer Deck
- 1 Extra Pair Flushmount D-Rings on Steel Floor
- 1 Pair D-Rings
- Add 7-Way RV Plug to Rear Bumper
- HD 25k Jost 2x Jacks
- 2 Hydraulic Monster Jacks™
- Add LED Reverse Lights
- No Ramps No Ramp Pockets
- 1 Pair Weld-On Strap Ratchets
- 1 Side-mount Toolbox 45"x14"
- 1 Side-mount Toolbox 72"x14"
- 2 Extra Side Marker Lights, 1 Per Side
- Plate for Winch
- Under Frame Tie Down Flat
- 22 lb. I-Beam Main Frame
- 12"oc Crossmembers
- Rough Oak Floor

Receiver Hitch

- 4" Ratchets every 4ft w/ Slide Track
- 6" Axle Spread (Longer Equalizer)
- 72" Axle Spread
- 11ga (1/8") DP Steel Floor w/4 D-Rings & 12"oc Frame Bridging
- Diamond Plate Ramp Bottoms
- Torque Tube
- Bulldog 2-speed Jacks (12,000 lb.)
- Ramp Support Arms

LOW-PRO FLATDECK WITH SINGLES (LS)



Lengths: 12' - 44'



*Pictured with optional 5' dovetail & flip-over Monster Ramps



Length	Axles	Est. Base Weight†
20'	2 x 7,000 lbs	4,560 lbs / 2,068 kg
25'	2 x 7,000 lbs	5,110 lbs / 2,318 kg
28'	2 x 7,000 lbs	5,440 lbs / 2,468 kg
30'	2 x 7,000 lbs	5,660 lbs / 2,567 kg
35'	2 x 7,000 lbs	6,210 lbs / 2,817 kg
38'	2 x 7,000 lbs	6,540 lbs / 2,966 kg
40'	2 x 7,000 lbs	6,760 lbs / 3,066 kg

† Weights are estimated for base trailer.

PJ Trailers makes no guarantee regarding the accuracy of estimated weights.

STANDARD FEATURES

- 15,680 lb. G.V.W.R.
- 7,000 lb. x 2 G.A.W.R.
- GN 2 5/16" Ball Bulldog Coupler 25,000 lb
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Dexter E-Z Lube Brake Axles (7,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 4 - 16" White Spoke Wheels
- 4 - 235/80R16 Radial Tires (3,520 lb)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Monster Steps on Both Sides
- Lockable Front Toolbox w/ Chain Holder
- 8' Ramps w/ Holders
- Frame Bridge Standard on 30' and up.
- 12" x 14 lb. I-Beam Main Frame, Riser & Neck
- 3" Channel Crossmembers 16" on Center
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- All-Weather Wiring Harness (7-way RV)
- Sand Blasted, Acid Washed, Powder Coated
- 5 year Dexter Axle Warranty

AVAILABLE OPTIONS

* denotes a standard feature

COUPLER OPTIONS

- GN 2 5/16" Round (25,000 lb.) w/ Toolbox*
- BP 2 5/16" Adj Rigid Mount (25,000 lb.) w/Tbx
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- 3" Pintle Eye - Face-mount (36,000 lb.) w/Tbx
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

AXLE OPTIONS

7,000# (DEXTER)

- (2) Electric (Spring)*
- (2) Electric (Torsion)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Spring)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Torsion)
- (3) Electric (Spring)
- (3) Electric (Torsion)
- (3) Elec/Hyd Disc (1,600 PSI Pump) (Spring)
- (3) Elec/Hyd Disc (1,600 PSI Pump) (Torsion)

8,000# OIL BATH W/14 PLY LR-G TIRES (DEXTER)

- (2) Electric (Spring)
- (2) Electric (Torsion)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Spring)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Torsion)
- (3) Electric (Spring)
- (3) Electric (Torsion)
- (3) Elec/Hyd Disc (1,600 PSI Pump) (Torsion)

7,000# W/14 PLY LR-G TIRES (DEXTER)

- (2) Electric (Spring)
- (2) Electric (Torsion)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Spring)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Torsion)

- (3) Electric (Spring)
- (3) Electric (Torsion)
- (3) Elec/Hyd Disc (1,600 PSI Pump) (Spring)
- (3) Elec/Hyd Disc (1,600 PSI Pump) (Torsion)
- 8,000# OIL BATH W/215/75R17.5 LR-H SINGLES(DEXTER)**
- (2) Electric (Spring)

TAIL OPTIONS

- Straight Deck w/ 8' Slide-in Ramps*
- 5' Dovetail w/ 2 Flip-over Ramps
- 5' Dovetail w/ 3 Flip-over Ramps
- 5' Dovetail w/ 2 Flip-over Monster Ramps
- 5' Dovetail w/ Power Tail (Pat. Pend. TX Only)

OTHER OPTIONS

- Add BlackWood Pro to Dovetail and Ramps
- Add BlackWood Pro to Dovetail
- Blackwood Pro Full Deck
- Blackwood Pro Outer Deck
- 1 Extra Pair Flushmount D-Rings on Steel Floor
- 1 Pair D-Rings
- 3/8" DP Steel Floor w/4 D-Rings & 12"oc
- Add 7-Way RV Plug to Rear Bumper
- 2 Hydraulic Monster Jacks™
- Add LED Reverse Lights
- Light Bar w/4 Lights
- No Ramps No Ramp Pockets
- 1 Pair Weld-On Strap Ratchets
- 1 Side-mount Toolbox 45"x14"
- 1 Side-mount Toolbox 72"x14"
- 2 Extra Side Marker Lights, 1 Per Side

- Under Frame Spare Tire & Mnt.(Not Comp.w/17.5 T/W)
- Top Riser Toolbox
- Plate for Winch
- 6" Taller GN Riser
- Under Frame Tie Down Flat
- 19 lb. I-Beam Main Frame, Riser & Neck
- 22 lb. I-Beam Main Frame, Riser & Neck
- 12"oc Crossmembers
- Rough Oak Floor
- Receiver Hitch
- 4" Ratchets every 4ft w/ Slide Track
- 11ga (1/8") DP Steel Floor w/4 D-Rings & 12"oc
- Frame Bridging
- Diamond Plate Ramp Bottoms
- Torque Tube
- Bulldog 2-speed Jacks (12,000 lb.)
- Ramp Support Arms



LOW-PRO FLATDECK WITH DUALS (LD)

Lengths: 16' - 44'



*Pictured with optional 5' dovetail & flip-over ramps



Length	Axles	Est. Base Weight†
20'	2 x 10,000 lbs	5,780 lbs / 2,622 kg
25'	2 x 10,000 lbs	6,300 lbs / 2,858 kg
30'	2 x 10,000 lbs	7,240 lbs / 3,284 kg
34'	2 x 10,000 lbs	7,820 lbs / 3,547 kg
38'	2 x 10,000 lbs	8,520 lbs / 3,865 kg
40'	2 x 10,000 lbs	8,780 lbs / 3,983 kg

† Weights are estimated for base trailer.
PJ Trailers makes no guarantee regarding the accuracy of estimated weights.

STANDARD FEATURES

- 25,000 lb. G.V.W.R.
- 10,000 lb. x 2 G.A.W.R.
- GN 2 5/16" Ball Bulldog Coupler 25,000 lb
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Dexter Oil Bath Brake Axles (10,000 lb.)
- 5 Leaf Slipper Spring Suspension
- 8 Dual Wheels, 16" Grey, 8 on 6.5" Bolt Pattern
- 8 - 16" 235/80R16 Radial Tires (3,090 lb)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Monster Steps on Both Sides
- Lockable Front Toolbox w/ Chain Holder
- 8' Ramps w/ Holders
- Frame Bridge Standard on 30' and up
- 12" x 19 lb. I-Beam Main Frame, Riser & Neck
- 3" Channel Crossmembers 16" on Center
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- All-Weather Wiring Harness (7-way RV)
- Sand Blasted, Acid Washed, Powder Coated
- 5 year Dexter Axle Warranty

AVAILABLE OPTIONS

* denotes a standard feature

COUPLER OPTIONS

- GN 2 5/8" Round (25,000 lb.) w/ Toolbox*
- GN 2 5/8" Round (30,000 lb.) w/ 6" Longer Tube
- GN 2 5/8" Round (30,000 lb.) w/ Toolbox
- GN 2 5/8" Square (30,000 lb.) w/ Toolbox
- GN 2 5/8" Square (25,000 lb.) w/ Toolbox

AXLE OPTIONS

- 10,000# W/235/75R17.5" LR-J SINGLE T&W (DEXTER)**
- (2) Electric (Spring)
- (2) Electric (Torsion)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Spring)
- 10,000# AXLES (DEXTER)**
- (2) Air (Spring)

- (2) Electric (Spring)*
- 10,000# W/14 PLY LR-G DUAL T&W(DEXTER)**
- (2) Electric (Spring)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Spring)
- 12,000# AXLES (DEXTER)**
- (2) Electric (Spring)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Air Ride)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Spring)
- (3) Electric (Spring)
- (3) Elec/Hyd Disc (1,600 PSI Pump) (Spring)
- 12,000# W/215/75R17.5" LR-H DUAL T&W (DEXTER)**
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Air Ride)
- 12,000# W/14 PLY LR-G DUAL T&W (DEXTER)**
- (2) Electric (Spring)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Spring)
- 15,000# W/215/75R17.5" LR-H DUAL T&W (DEXTER)**
- (2) Elec/Hyd Drum (1,000 PSI Pump) (Spring)

- Blackwood Pro Outer Deck
- 1 Extra Pair Flushmount D-Rings on Steel Floor
- 1 Pair D-Rings
- Add 7-Way RV Plug to Rear Bumper
- HD 25k Jost 2x Jacks
- 2 Hydraulic Monster Jacks™
- Add LED Reverse Lights
- No Ramps No Ramp Pockets
- 1 Pair Weld-On Strap Ratchets
- 1 Side-mount Toolbox 45"x14"
- 1 Side-mount Toolbox 72"x14"
- 2 Extra Side Marker Lights, 1 Per Side
- Plate for Winch
- Under Frame Tie Down Flat
- 22 lb. I-Beam Main Frame & Neck
- 12"oc Crossmembers
- Rough Oak Floor
- Receiver Hitch
- 4" Ratchets every 4ft w/ Slide Track
- 6" Axle Spread (Longer Equalizer)
- 72" Axle Spread
- 11ga (1/8") DP Steel Floor w/4 D-Rings & 12"oc Frame Bridging
- Diamond Plate Ramp Bottoms
- Torque Tube
- Bulldog 2-speed Jacks (12,000 lb.)
- Ramp Support Arms



BUILT FOR HOT SHOOTERS

With industry-leading warranties, a low-profile deck height, tandem dual axles and nearly unlimited option combinations, the LD is a premier choice for professional contract drivers and industrial applications.

TAIL OPTIONS

- Straight Deck w/ 2 Slide-in Ramps*
- 5' Dovetail w/ 2 Flip-over Ramps w/HD Gusset
- 5' Dovetail w/ 2 Flip-over Ramps
- 5' Dovetail w/ 3 Flip-over Ramps w/HD Gusset
- 5' Dovetail w/ 3 Flip-over Ramps
- 5' Dovetail w/ 2 Flip-over Monster Ramps
- 5' Dovetail w/ Power Tail (Pat. Pend. TX Only)

OTHER OPTIONS

- Add BlackWood Pro to Dovetail and Ramps
- Add BlackWood Pro to Dovetail
- Blackwood Pro Full Deck

14" I-BEAM LOW-PRO WITH DUALS (L3)



Lengths: 16' - 44'



*Pictured with optional 5' dovetail & flip-over Monster Ramps



Length	Axles	Est. Base Weight†
20'	2 x 12,000 lbs	5,960 lbs / 2,703 kg
25'	2 x 12,000 lbs	6,710 lbs / 3,044 kg
30'	2 x 12,000 lbs	7,460 lbs / 3,384 kg
35'	2 x 12,000 lbs	8,210 lbs / 3,724 kg
40'	2 x 12,000 lbs	8,960 lbs / 4,064 kg

† Weights are estimated for base trailer.
PJ Trailers makes no guarantee regarding the accuracy of estimated weights.

STANDARD FEATURES

- 30,000 lb. G.V.W.R.
- 12,000 lb. x 2 G.A.W.R.
- GN 2 5/16" Ball Bulldog Coupler 30,000 lb
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Dexter Oil Bath Brake Axles (12,000 lb.)
- 5 Leaf Slipper Spring Suspension
- 8 Dual Wheels, 16" Grey, 8 on 6.5" Bolt Pattern
- 8 - 16" 235/80R16 Radial Tires (3,090 lb)
- 3" Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Monster Steps on Both Sides
- Lockable Front Toolbox w/ Chain Holder
- 8' Ramps w/ Holders
- Frame Bridge Standard on 30' and up
- 14" x 5" x 22 lb. I-Beam Main Frame, Riser & Neck
- 3" Channel Crossmembers 16" on Center

- 2 x 8 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- All-Weather Wiring Harness (7-way RV)
- Sand Blasted, Acid Washed, Powder Coated
- 5 year Dexter Axle Warranty

AVAILABLE OPTIONS

* denotes a standard feature

COUPLER OPTIONS

- GN 2 5/8" Round (30,000 lb.) w/ Toolbox*
- GN 2 5/8" Round (30,000 lb.) w/ 6" Longer Tube
- GN 2 3/4" Square (30,000 lb.) w/ Toolbox

AXLE OPTIONS

10,000# AXLES (DEXTER)

- (2) Electric (Spring)

12,000# AXLES (DEXTER)

- (2) Air (Air Ride)
- (2) Air (Spring)
- (2) Electric (Air Ride)
- (2) Electric (Spring)*
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Air Ride)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Spring)
- (3) Electric (Spring)
- (3) Elec/Hyd Disc (1,600 PSI Pump) (Spring)

12,000# W/14 PLY LR-G DUAL T&W (DEXTER)

- (2) Electric (Spring)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Spring)

15,000# W/215/75R17.5" LR-H DUAL T&W (DEXTER)

- (2) Elec/Hyd Drum (1,000 PSI Pump) (Spring)

12,000# W/215/75R17.5" LR-H DUAL T&W (DEXTER)

- (2) Elec/Hyd Disc (1,600 PSI Pump) (Air Ride)

TAIL OPTIONS

- Straight Deck w/ 2 Slide-in Ramps*
- 5' Dovetail w/ 2 Flip-over Ramps w/HD Gusset
- 5' Dovetail w/ 2 Flip-over Ramps
- 5' Dovetail w/ 3 Flip-over Ramps w/HD Gusset
- 5' Dovetail w/ 3 Flip-over Ramps

- 5' Dovetail w/ 2 Flip-over Monster Ramps
- 5' Dovetail w/ Power Tail (Pat. Pend. TX Only)

OTHER OPTIONS

- Add BlackWood Pro to Dovetail and Ramps
- Blackwood Pro Full Deck
- Blackwood Pro Outer Deck
- 1 Extra Pair Flushmount D-Rings on Steel Floor
- 1 Pair D-Rings
- Add 7-Way RV Plug to Rear Bumper
- HD 25k Jost 2x Jacks
- 2 Hydraulic Monster Jacks™
- No Ramps No Ramp Pockets
- 1 Pair Weld-On Strap Ratchets
- 1 Side-mount Toolbox 45"x14"
- 1 Side-mount Toolbox 72"x14"
- 2 Extra Side Marker Lights, 1 Per Side
- Plate for Winch
- Under Frame Tie Down Flat
- 12"oc Crossmembers
- Rough Oak Floor
- Receiver Hitch
- 4" Ratchets every 4ft w/ Slide Track
- 6" Axle Spread (Longer Equalizer)
- 11ga (3/16") DP Steel Floor w/4 D-Rings & 12"oc Frame Bridging
- Diamond Plate Ramp Bottoms
- Torque Tube
- Bulldog 2-speed Jacks (12,000 lb.)
- Ramp Support Arms



14" I-BEAM FRAME

We build the L3 with a sturdy 14", 22-pound I-beam frame, neck, risers and dovetail. This heavy-duty material provides the enhanced durability needed to withstand regular hauling, season after season.



PIERCED I-BEAM CROSSMEMBERS

Plasma cutting our main frame allows us to place the 3" channel crossmembers through the I-beam structure, which provides a lower deck height. This extra step makes all the difference when hauling certain loads.



LOW-PRO WITH HYDRAULIC DOVE (LY)

Lengths: 30' - 44'



Length	Axles	Est. Base Weight†
30'	2 x 10,000 lbs	7,840 lbs / 3,556 kg
32'	2 x 10,000 lbs	8,080 lbs / 3,665 kg
34'	2 x 10,000 lbs	8,400 lbs / 3,810 kg
36'	2 x 10,000 lbs	8,700 lbs / 3,946 kg

† Weights are estimated for base trailer.
PJ Trailers makes no guarantee regarding the accuracy of estimated weights.

STANDARD FEATURES

- 25,000 lb. G.V.W.R.
- 10,000 lb. x 2 G.A.W.R.
- GN 2 5/16" Ball Bulldog Coupler 25,000 lb
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Dexter Oil Bath Brake Axles (10,000 lb.)
- 5 Leaf Slipper Spring Suspension
- 8 Dual Wheels, 16" Grey, 8 on 6.5" Bolt Pattern
- 8 - 16" 235/80R16 Radial Tires (3,090 lb)
- Interstate (TM) Deep Cycle Battery
- 110V Integrated Trickle Charger
- Self Contained Hydraulic Unit
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Monster Steps on Both Sides
- Lockable Front Toolbox w/ Chain Holder
- 10' Hydraulic Dovetail
- Frame Bridge Standard on 30' and up.
- 12" x 19 lb. I-Beam Main Frame, Riser & Neck
- 3" Channel Crossmembers 16" on Center
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- All-Weather Wiring Harness (7-way RV)
- Sand Blasted, Acid Washed, Powder Coated
- 5" x 7 1/2" Hyd. Cylinder
- 5 year Dexter Axle Warranty

AVAILABLE OPTIONS

* denotes a standard feature

COUPLER OPTIONS

- GN 2 5/16" Round (25,000 lb.) w/ Toolbox*
- BP 2 5/16" Adj Rigid Mount (25,000 lb.) w/Tbx
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- 3" Pintle Eye - Face-mount (36,000 lb.) w/Tbx
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

AXLE OPTIONS

10,000# AXLES (DEXTER)

- (2) Electric (Air Ride)
- (2) Electric (Spring)*
- (2) Electric (Torsion)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Air Ride)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Spring)
- (3) Electric (Spring)
- (3) Electric (Torsion)
- (3) Elec/Hyd Disc (1,600 PSI Pump) (Spring)

12,000# AXLES (DEXTER)

- (2) Electric (Air Ride)
- (2) Electric (Spring)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Air Ride)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Spring)
- (3) Electric (Spring)
- (3) Elec/Hyd Disc (1,600 PSI Pump) (Spring)

12,000# W/14 PLY LR-G DUAL T&W (DEXTER)

- (2) Electric (Spring)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Air Ride)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Spring)

15,000# W/215/75R17.5" LR-H DUAL T&W (DEXTER)

- (2) Elec/Hyd Drum (1,000 PSI Pump) (Spring)

12,000# W/215/75R17.5" LR-H DUAL T&W (DEXTER)

- (2) Elec/Hyd Disc (1,600 PSI Pump) (Air Ride)

10,000# W/235/75R17.5" LR-J SINGLE T&W (DEXTER)

- (2) Electric (Spring)
- (2) Electric (Torsion)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Spring)

10,000# W/14 PLY LR-G DUAL T&W(DEXTER)

- (2) Electric (Spring)
- (2) Elec/Hyd Disc (1,600 PSI Pump) (Spring)

TAIL OPTIONS

- 10' Hydraulic Dovetail*
- 10' Hydraulic Self Cleaning Dovetail

OTHER OPTIONS

- Blackwood Pro Full Deck (Tail Only)
- Blackwood Pro Outer Deck (Tail Only)
- Blackwood Pro Full Deck
- Blackwood Pro Outer Deck
- 1 Extra Pair Flushmount D-Rings on Steel Floor
- 1 Pair D-Rings
- HD 25k Jost 2x Jacks
- 2 Hydraulic Monster Jacks™
- Light Bar w/4 Lights
- 1 Pair Weld-On Strap Ratchets
- 1 Side-mount Toolbox 45"x14"
- 1 Side-mount Toolbox 72"x14"

- 2 Extra Side Marker Lights, 1 Per Side
- Top Riser Toolbox
- 1/2 x 1/2 Square Traction Bars on Rear of Deck
- Hutch susp. H9700-Underslung Tandem Axle
- Hutch susp. H9700-Underslung Triple Axle
- Plate for Winch
- Solar Battery Charger
- 6" Taller GN Riser
- 3/4" DP Steel Floor w/ 4 D-Rings & 12"oc
- Under Frame Tie Down Flat
- 22 lb. I-Beam Main Frame & Neck
- 12"oc Crossmembers
- Rough Oak Floor
- 4" Ratchets every 4ft w/ Slide Track
- 6" Axle Spread (Longer Equalizer)
- 72" Axle Spread
- 11ga (1/8") DP Steel Floor w/ 4 D-Rings & 12"oc
- Torque Tube
- Bulldog 2-speed Jacks (12,000 lb.)



WHAT IS BLACKWOOD?

Blackwood is a wooden lumber product with rubber infused to the top of each board. Blackwood Max-Trac has a treaded rubber insert that covers approximately 75% of the board surface. Blackwood Pro has rubber layer that covers the entire top surface of each board. Blackwood solves several age old trailer lumber problems.

TRACTION

Blackwood considerably improves traction over typical lumber. With the tactile surface of Blackwood your cargo is less likely to slide and shift while towing your trailer

DURABILITY



Blackwood's industrial grade, UV resistant rubber helps absorb heavy impacts that might crack or damage typical lumber, while also preventing stains and discoloration. It can be easily cleaned with water. This ultra-durable material can handle twisting and torque of equipment like skid steers without issue.

LUMBER QUALITY

Blackwood is made with Weyerhaeuser Treater Series Lumber. Treater series lumber goes through strict computerized grading that greatly minimizes warping.

SAFETY & COMFORT

Blackwood increases your traction when walking on the trailer deck to prevent slipping & falling, improving your personal safety.

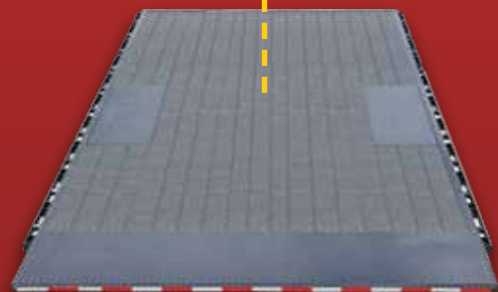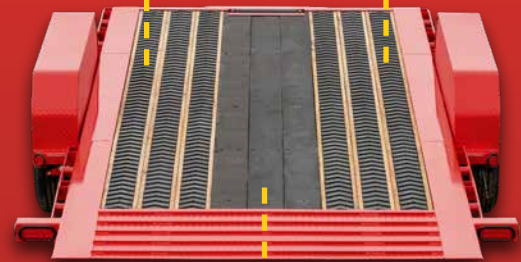

All wood decking is not created equal! When you invest in a trailer with LOKT Lumber, you are getting a premium wood deck that has been carefully dried, treated and sorted to pass strict guidelines that will increase the life of your deck.

Introducing MAX-TRAC, our latest revolutionary deck option that delivers maximum loading traction. With MAX-TRAC you can easily load your equipment or vehicle in extreme environments, both quickly and more importantly, safely.

FLATDECK & DECKOVER OPTIONS GUIDE

POWDER COAT COLOR OPTIONS:

ACTUAL COLOR MAY VARY, CHECK SPECIFIC MODEL PAGE FOR AVAILABLE COLORS



BLACK



GREY



DESERT TAN



WHITE



RED



TRACTOR ORANGE

TAIL OPTIONS:



STRAIGHT DECK
W/ 8' SLIDE-IN RAMPS



5' DOVETAIL
W/ 2 FLIP-OVER RAMPS



5' DOVETAIL
W/ 3 FLIP-OVER RAMPS



**MONSTER
RAMPS**



POWER TAIL
BY PJ TRAILERS PATENT PENDING

OTHER OPTIONS:



12" ON CENTER
CROSSMEMBERS



D-RINGS



ROUGH OAK FLOOR



WELD ON STRAP
RATCHETS (2)



UNDERFRAME TIE
DOWN FLAT



72" AXLE SPREAD



SLIDING STRAP
RATCHETS



STEEL FLOOR & 4 D-RINGS




2 SPEED JACKS



DIAMOND PLATE
RAMP BOTTOMS



TORQUE TUBE



REMOVABLE
DECK ON THE NECK



SIDE-MOUNT TOOLBOX



HINGED SIDE MOUNT
WOOD RACK



PROMAXX
AIR SUSPENSION



PJ TRAILERS

- #1 Professional Grade Open Trailer Manufacturer
- Broad Line of Dumps, Flatdecks, Utilities, Carhaulers, Tilts & Equipment Trailers
- Over 300 Independent PJ Trailers Dealer Locations in the US & Canada

Visit Us Online at www.pjtrailers.com



YouTube